
# K-BOX CLICK-CLOCK

Boxed set - click-clock

## Características

| | |
|---|---|
| **Pressão de trabalho** | Max. 16 bar |
| **Temperatura operacional** | -20 °C to +80 °C |
| **Material** | Latão niquelado |
| **Anel de pressão** | Hostaform |
| **O-Ring** | NBR |
| **Anel tensor** | Stainless steel |

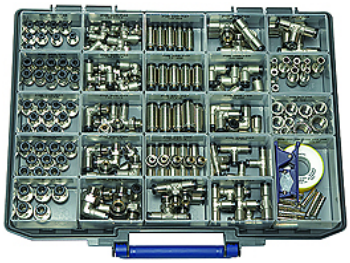

## Descrição

45 male connectors G 1/8-4, G 1/8-6, G 1/4-8, G 3/8-8<br>35 swivel type male elbows G 1/8-4, G 1/8-6, G 1/4-6, G 1/4-8, G 3/8-8<br>15 unions 4, 6, 8 mm<br>10 union elbows 6, 8 mm<br>15 union tees 4, 6, 8 mm<br>15 swivel type male branch tees G 1/8-6, G 1/4-6, G 1/4-8<br>9 reducers with push-in plug 8/6, 10/6, 10/8<br>10 plugs 6, 8 mm<br>10 sockets G 1/8, G 1/4, G 3/8<br>1 PTFE-sealing tape<br>1 hose cutter

## Informações adicionais

Further types and dimensions on request.

## Artigo

| Descrição | Definição |
|---|---|
| **K- 07 40 35 24** | Boxed set, >click-clock< Series push-in fittings |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*