


## Caracteristici

|                      |                                  |
|----------------------|----------------------------------|
| Racord 1             | Racord alămit                    |
| Racord 2             | Filete cilindrice exterioare BSP |
| Formă de etanșare 2  | Con interior 60°                 |
| Tip constructiv      | Ștuț alămit                      |
| Forma constructivă   | drept                            |
| Material             | Oțel                             |
| Protecția suprafeței | uns                              |

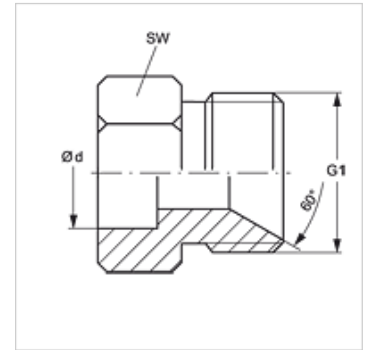

## Articol

| Denumire      | Ø d (mm) | G1         | L1 (mm) | SW (mm) |
|---------------|----------|------------|---------|---------|
| LOET 04 HB 08 | 8        | G 1/4" -19 | 21,0    | 19      |
| LOET 04 HB 12 | 12       | G 1/4" -19 | 21,0    | 19      |
| LOET 06 HB 14 | 14       | G 3/8" -19 | 27,0    | 24      |
| LOET 06 HB 16 | 16       | G 3/8" -19 | 27,0    | 24      |
| LOET 08 HB 14 | 14       | G 1/2" -14 | 29,5    | 29      |
| LOET 08 HB 16 | 16       | G 1/2" -14 | 29,5    | 24      |
| LOET 08 HB 18 | 18       | G 1/2" -14 | 29,5    | 29      |
| LOET 08 HB 20 | 20       | G 1/2" -14 | 32,5    | 29      |
| LOET 12 HB 20 | 20       | G 3/4" -14 | 37,5    | 35      |
| LOET 12 HB 25 | 25       | G 3/4" -14 | 37,5    | 35      |
| LOET 16 HB 25 | 25       | G 1" -11   | 41,0    | 43      |
| LOET 16 HB 30 | 30       | G 1" -11   | 41,0    | 43      |

Ø d = Diametrul exterior al țevii