

# VERSCHLUSS IR

Dop tip piuliță

**HANSA FLEX**

## Caracteristici

**Racord 1** Filete cilindrice interioare BSP



**Formă de etanșare 1** cu etanșare pe suprafață

**Tip constructiv** Dop tip piuliță

**Forma constructivă** drept

**Material** Oțel

**Protecția suprafeței** acoperire galvanică

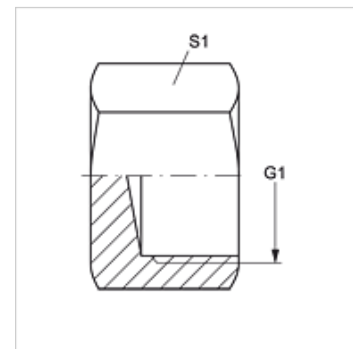

## Articol

Denumire	G1	S1
VERSCHLUSS IR 02	G 1/8" -28	14
VERSCHLUSS IR 04	G 1/4" -19	19
VERSCHLUSS IR 06	G 3/8" -19	22
VERSCHLUSS IR 08	G 1/2" -14	27
VERSCHLUSS IR 12	G 3/4" -14	32
VERSCHLUSS IR 16	G 1" -11	41
VERSCHLUSS IR 20	G 1.1/4" -11	50
VERSCHLUSS IR 24	G 1.1/2" -11	55
VERSCHLUSS IR 32	G 2" -11	70

SW , S1, S2 = deschiderea cheii