

K-DICHTRINGE POLYAMID



Sealing rings, polyamide, max. temperature 80 °C

HANSA FLEX

Caracteristici

Temperatură Max. +80 °C

Material Poliamidă

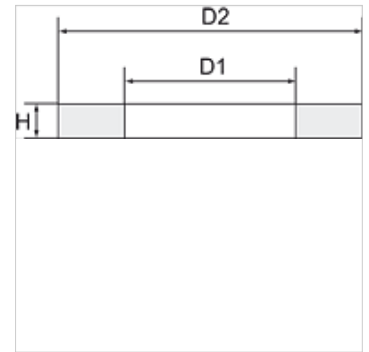

Indicație

Alte date sunt disponibile la cerere.

Indicații referitoare comandă

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Articol

Denumire	pentru filet	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 02 95	M 5	5,1	8,0	1,0
K- 07 10 02 99	G 1/2	21,0	28,0	1,5
K- 07 10 02 97	G 1/4	13,2	18,0	1,5
K- 07 10 02 98	G 3/8	16,8	22,0	1,5
K- 07 10 03 01	G 1	33,3	38,9	2,0
K- 07 10 03 00	G 3/4	26,8	33,0	2,0
K- 07 10 02 96	G 1/8	10,0	13,0	1,5