

# K-DICHTRINGE ALU



Sealing rings, aluminium, max. temperature 250 °C

**HANSA FLEX**

## Caracteristici

**Temperatură** Max. +250 °C

**Material** Aluminiu

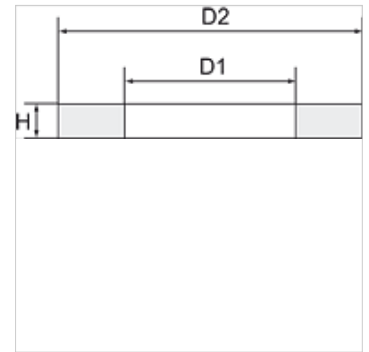

## Indicație

Alte date sunt disponibile la cerere.

## Indicații referitoare comandă

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

## Articol

| Denumire       | pentru filet | D1<br>(mm) | D2<br>(mm) | H<br>(mm) |
|----------------|--------------|------------|------------|-----------|
| K- 07 10 03 02 | M 5          | 5,1        | 8,0        | 1,0       |
| K- 07 10 03 06 | G 1/2        | 21,0       | 28,0       | 1,5       |
| K- 07 10 03 04 | G 1/4        | 13,3       | 18,0       | 1,5       |
| K- 07 10 03 05 | G 3/8        | 17,0       | 21,8       | 1,5       |
| K- 07 10 03 08 | G 1          | 33,3       | 38,9       | 2,0       |
| K- 07 10 03 07 | G 3/4        | 26,5       | 33,0       | 2,0       |
| K- 07 10 03 03 | G 1/8        | 10,0       | 13,8       | 1,5       |