

# K-INLINE-EJEKTOREN VR

Inline ejectors »VR«, screw connection

**HANSA FLEX**

## Caracteristici


**Caracteristici** Vacuum generator with high maximum vacuum level (85% vacuum)  
No moving parts, which means no wear and no maintenance  
ultra small footprint, suitable for confined spaces  
minimal air consumption  
low noise

**Utilizare** by screwing / plugging into the distribution beam  
direct attachment to the suction pad  
for handling various workpieces

**Carcasă** Aluminium eloxed (type VR)

**Sistem de duze** Brass (type VR)

**Racord** Racord tip fișă

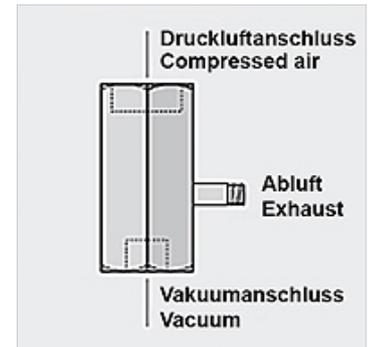

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

## Articol

Denumire	Dimensiune duză	Racord pentru aer evacuat	Racord de aer comprimat	Racord de vid	Grad de evacuare	Consum de aer la aspirare (L/min)	Capacitate max. de aspirare (L/min)	Lungime (mm)	Presiune de lucru (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0