

# K-KOMPAKTEJEKTOREN CP SYST

Compact ejectors »CP«, system monitoring function: digital vacuum switch

**HANSA FLEX**


## Caracteristici

**Caracteristici** Vacuum generator with integrated control valves and system monitoring functions  
Gripping and blowing off can be controlled without the need for external valves  
Optimised air consumption thanks to many models with differing suction capacities  
Minimum energy costs in continuous operation thanks to automatic air-saving  
Easy adjustment with foil keypad and LED display of the settings

**Utilizare** Handling of air-tight or slightly porous workpieces in fully automated handling systems  
e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries

**Corp de bază** Anodised aluminium

**Integrat** NC blow-off valve, filter, silencer, non-return valve

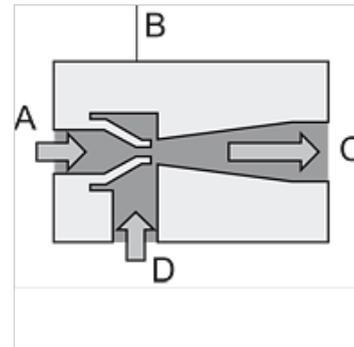

## Indicație

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Alte date sunt disponibile la cerere.

## Descriere

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Informații suplimentare

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

## Articol

Denumire	Dimensiune duză	Poziție de repaus a supapei de aspirație	Racord de aer comprimat	Racord de vid	Consum de aer la aspirare (L/min)	Capacitate max. de aspirare (L/min)	Dimensiuni	Presiune de lucru (bar)
K- 07 45 01 35	1,5	NC	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 36	1,5	NO	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 39	2,0	NC	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 40	2,0	NO	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 43	2,5	NC	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0
K- 07 45 01 44	2,5	NO	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0

## Accesorii

K-ANSCH KABEL VAKUUMSCHAL Connection cable for vacuum switch

K-ERSATZSCHALLDAEMPFER 2 Replacement silencers

K-ERSATZFILTERELEMENTE Replacement filter element