# K-KOMPAKTEJEKTOREN MINI


Mini-compact ejectors

HANSA FLEX

## Caracteristici

| | |
|---|---|
| **Caracteristici** | Vacuum generator with integrated control valves and system monitoring functions<br>Gripping and blowing off can be controlled without the need for external valves<br>Optimised air consumption thanks to many models with differing suction capacities<br>Minimum energy costs in continuous operation<br>Easy adjustment with foil keypad, LED display of the settings<br>Minimum size and low weight<br>Optimum vacuum generation directly on the suction pad<br>Complete solution for very simple installation<br>Short learning curve thanks to "teach" function<br>No need for additional sensors<br>Easily visible status indication |
| **Utilizare** | Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes<br>pick-and-place systems |
| **Grad de evacuare** | 85 % |
| **Corp de bază** | Anodised aluminium |
| **Integrat** | NC blow-off valve, filter, silencer, non-return valve |



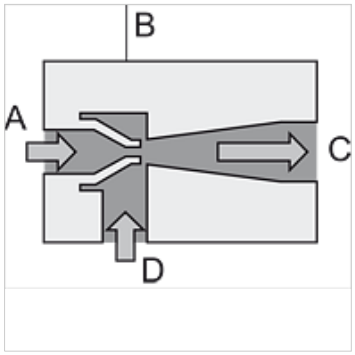


## Indicaţie

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Alte date sunt disponibile la cerere.

## Descriere

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Informaţii suplimentare

Important: Order two connection plugs per ejector.

## Articol

| Denumire | Dimensiune duză | Poziţie de repaus a supapei de aspiraţie | Racord de aer comprimat | Racord de vid | Consum de aer la aspirare (L/min) | Capacitate max. de aspirare (L/min) | Dimensiuni | Presiune de lucru (bar) |
|---|---|---|---|---|---|---|---|---|
| **K- 07 45 01 46** | 1,0 | NC | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |
| **K- 07 45 01 45** | 1,0 | NO | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |

## Accesorii

| | |
|---|---|
| **K-ANSCHLUSSSTECK MAGNETVE 1** | Connection plug for solenoid valves |
| **K-ERSATZSCHALLDAEMPFER** | Replacement silencers |
| **K-ERSATZFILTERELEMENTE 1** | Replacement filter element |

*În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.*