

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Caracteristici

Utilizare	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Caracteristici speciale	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

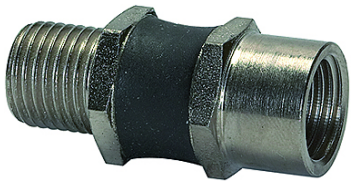

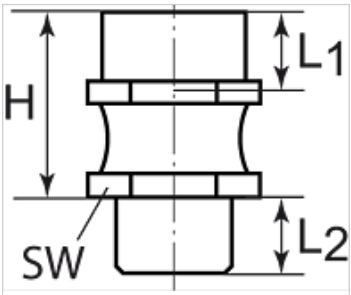

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Articol

Denumire	Filet 1 interior	Filet 2 exterior	H (mm)	Material	L1 (mm)	L2 (mm)	Unghi W (°)	Încărcare pe verticală (N/m2)	Moment încovoiere (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.