


K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Caracteristici

| | |
|---------------------------|---|
| Tip constructiv | PNP |
| Racord de mediu măsurat | G 1/8 male and M 5 female |
| Histerează | Adjustable: 3 to 25% of set value |
| Domeniu de temperaturi | 0 - 50 °C |
| Medii | Non-aggressive gases. dry, oil-free air |
| Carcasă | Polycarbonate |
| Semnal de ieşire | Analogue: 1 to 5 V |
| Conexiune electrică | Male connector M8, four pin |
| Capacitate de întrerupere | 125 mA |
| Consum de curent | 30 mA |
| Afişaj de stare | LED |

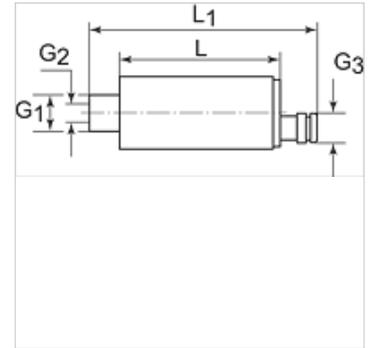

Indicație

Alte date sunt disponibile la cerere.

Descriere

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Articol

| Denumire | Filet 1 exterior | Filet 2 interior | Filet 3 exterior | L (mm) | L1 (mm) | Domeniu de măsurare | Tensiune |
|----------------|------------------|------------------|------------------|-----------|------------|---------------------|----------------|
| K- 07 45 01 31 | G 1/8 | M 5 | M 8 x 1 | 44,0 | 62,0 | -1 bis +10 bar | 10.8 - 30 V DC |