


# K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

**HANSA FLEX**

## Caracteristici

<b>Utilizare</b>	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
<b>Medii</b>	dry, oil-free air and non-aggressive gases
<b>Domeniu de temperaturi</b>	0 - 50 °C
<b>Semnal de ieșire</b>	1 to 5 analogous to V
<b>Histereză</b>	Fixed: 20 mbar (model with digital sensor)
<b>Lungime cablu</b>	3 m
<b>Tip de protecție</b>	IP 40

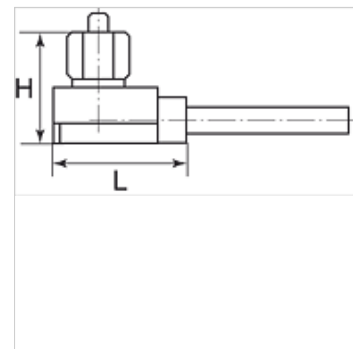

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

## Articol

Denumire	Racord	H (mm)	L (mm)	Domeniu de măsurare	Tensiune
K- 07 45 01 57	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC