


# K-HAND-SCHIEBEVENTIL

Manual slide valves

**HANSA FLEX**

## Caracteristici

|                      |              |
|----------------------|--------------|
| Presiune de lucru    | max. 10 bari |
| Temperatura de lucru | max. +70 °C  |

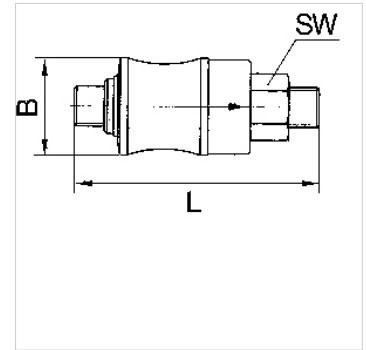

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

## Articol

| Denumire       | Filet | B<br>(mm) | L<br>(mm) | SW<br>(mm) |
|----------------|-------|-----------|-----------|------------|
| K- 07 30 15 92 | G 1/8 | 21,0      | 67,0      | 14         |
| K- 07 30 15 93 | G 1/4 | 24,0      | 77,0      | 17         |
| K- 07 30 15 94 | G 3/8 | 31,0      | 87,0      | 22         |
| K- 07 30 15 95 | G 1/2 | 35,0      | 104,0     | 26         |