

# K-MUFFEN ABSPERRVENTIL MS

Female thread globe valves

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | max. 10 bari |
| **Utilizare** | Non-corrosive liquids and steam up to +90 °C |
| **Carcasă, partea superioară** | Brass |
| **Garnitură de etanşare** | NBR |

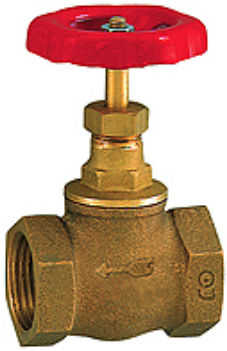




## Indicaţie

Alte date sunt disponibile la cerere.

## Articol

| Denumire | DN | Filet | B (mm) | L (mm) |
|---|---|---|---|---|
| **K- 07 30 22 23** | 15 | G 1/2 | 78,0 | 54,0 |
| **K- 07 30 22 24** | 20 | G 3/4 | 78,0 | 54,5 |
| **K- 07 30 22 25** | 25 | G 1 | 82,0 | 61,0 |
| **K- 07 30 22 26** | 32 | G 1 1/4 | 126,0 | 88,5 |
| **K- 07 30 22 27** | 40 | G 1 1/2 | 128,0 | 101,0 |
| **K- 07 30 22 28** | 50 | G 2 | 149,0 | 117,0 |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*