


K-DRV

Unidirectional flow control valves

Caracteristici

Presiune de lucru	max. 10 bari
Temperatura de lucru	max. +70 °C
Material de etanșare	NBR
Carcasă	Alu eloxed
Piese interioare	Brass

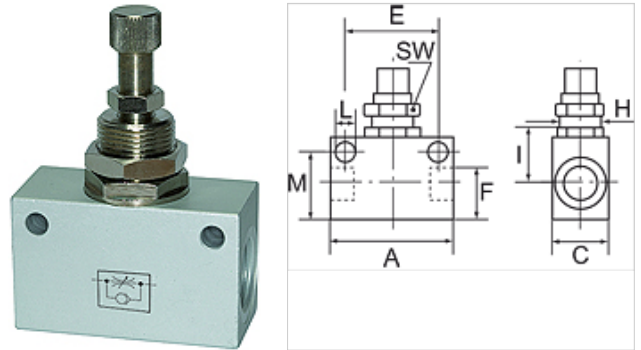

Indicație

Alte date sunt disponibile la cerere.

Descriere

These valves are restricted in the flow direction and have free passage in the opposite direction.

Articol

Denumire	Filet	A (mm)	C (mm)	E (mm)	H dimensiuni	I (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26