
# K-DRS ELK GERAETESTECKER

Pressure switches, connection with plug connector, type A acc. to DIN 43650

## Caracteristici

| | |
|---|---|
| **Domeniul de utilizare** | Pneumatic applications |
| **Frecvenţa comutării** | 200/min. |
| **Tensiune de comutare** | max. 250 V AC / 28 V DC |
| **Tip de protecţie** | IP 65 (DIN 43650), IP 67 (M 12 x 1) |
| **Domeniu de temperaturi** | -10 °C to +80 °C |
| **Capac de reglare** | Aluminium, powder-coated |
| **Carcasă** | Special die-cast material |
| **Membrană, garnitură** | NBR |



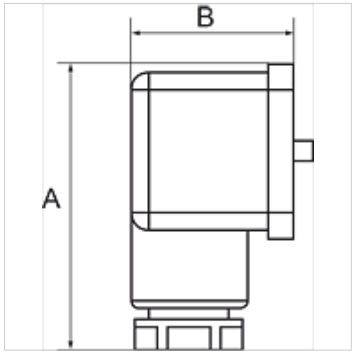


## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

## Articol

| Denumire | Racord | Domeniu de reglare | A (mm) | B (mm) |
|---|---|---|---|---|
| **K- 07 30 28 45** | G 1/4 | 0,2 - 2,0 bar | 48,0 | 28,0 |
| **K- 07 30 28 46** | G 1/4 | 0,5 - 8,0 bar | 48,0 | 28,0 |
| **K- 07 30 28 47** | G 1/4 | 1,0 - 16,0 bar | 48,0 | 28,0 |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*