
K-DRS ELK ANSCHLUSS M 1

Pressure switches, electrical connection M 12 x 1

Caracteristici

Domeniul de utilizare	Pneumatic applications
Frecvenţa comutării	200/min.
Tensiune de comutare	max. 250 V AC / 28 V DC
Tip de protecţie	IP 65 (DIN 43650), IP 67 (M 12 x 1)
Domeniu de temperaturi	-10 °C to +80 °C
Capac de reglare	Aluminium, powder-coated
Carcasă	Special die-cast material
Membrană, garnitură	NBR



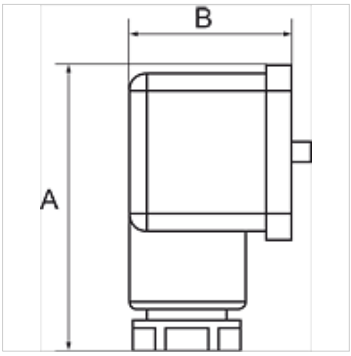

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Articol

Denumire	Racord	Domeniu de reglare	A (mm)	B (mm)
K- 07 30 28 48	G 1/4	0,2 - 2,0 bar	48,0	28,0
K- 07 30 28 49	G 1/4	0,5 - 8,0 bar	48,0	28,0
K- 07 30 28 50	G 1/4	1,0 - 16,0 bar	48,0	28,0

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.