


### Caracteristici

Presiune de lucru	max. 55 bar (depending on connection size and temperature)
Temperatura de lucru	Max. 150 °C
Garnitură de etanșare	PTFE
Manetă	Stainless steel 1.4301

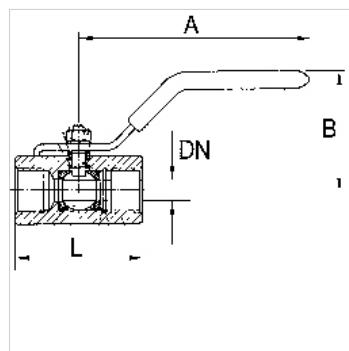

### Indicație

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Alte date sunt disponibile la cerere.

### Descriere

Full bore with G 1/4 to G 3/8, reduced bore with G 1/2 to G 2

### Indicații referitoare comandă

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

### Articol

Denumire	DN	Filet	A (mm)	B (mm)	L (mm)	Material
K-07 30 14 94	5	G 1/4	60,0	30,0	39,8	Stainless steel 1.4401/1.4408
K-07 30 14 95	7	G 3/8	80,0	33,0	44,8	Stainless steel 1.4401/1.4408
K-07 30 14 96	9	G 1/2	110,0	57,0	56,5	Stainless steel 1.4401/1.4408
K-07 30 14 97	13	G 3/4	110,0	61,0	60,0	Stainless steel 1.4401/1.4408
K-07 30 14 98	15	G 1	124,0	70,0	70,0	Stainless steel 1.4401/1.4408
K-07 30 14 99	20	G 1 1/4	152,0	75,0	77,6	Stainless steel 1.4401/1.4408
K-07 30 15 00	25	G 1 1/2	150,0	80,0	87,0	Stainless steel 1.4401/1.4408
K-07 30 15 01	32	G 2	155,0	85,0	102,0	Stainless steel 1.4401/1.4408