


K-S-BKR M ENTL

Safety ball valves

HANSA FLEX

Caracteristici

Temperatura de lucru	0 °C to +60 °C
Descriere filet	Rp thread acc. to ISO 7-1
Material de etanșare	PTFE
Carcasă, bilă, ax, presetupă	Nickel-plated brass
Manetă	Die-cast aluminium, black
Material	sealing: PTFE

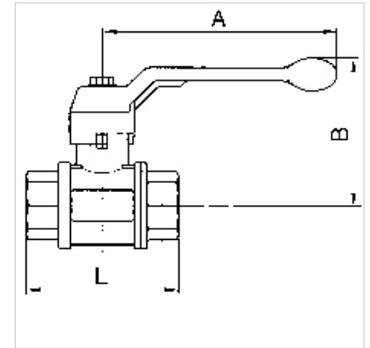

Indicație

Alte date sunt disponibile la cerere.

Descriere

2/2-way brass safety ball valves. Specially designed for pneumatic applications. The ball valve shuts off the supply side and relieves the application into the atmosphere.

Articol

Denumire	DN	Filet	A (mm)	B (mm)	L (mm)	Presiune de lucru max. la 20°C (bar)
K- 07 30 21 08	8	Rp 1/4	100,0	61,0	52,0	12
K- 07 30 21 09	10	Rp 3/8	100,0	61,0	55,0	12
K- 07 30 21 10	15	Rp 1/2	100,0	64,0	69,0	12
K- 07 30 21 11	20	Rp 3/4	120,0	76,0	77,0	12
K- 07 30 21 12	25	Rp 1	120,0	80,0	89,0	12
K- 07 30 21 13	32	Rp 1 1/4	150,0	98,0	103,0	12
K- 07 30 21 14	40	Rp 1 1/2	150,0	104,0	114,0	12
K- 07 30 21 15	50	Rp 2	175,0	119,0	134,0	12