

# K-BKR LEICHT IG IG

Ball valves, lightweight type, female/female thread

## Caracteristici

| | |
|---|---|
| **Domeniul de utilizare** | Compressed air, water, non-toxic and non-corrosive gases, heating systems, agriculture |
| **Presiune de lucru** | Max. 40 bar |
| **Temperatura de lucru** | -15 °C to +90 °C |
| **Descriere filet** | G thread acc. DIN EN ISO 228-1 |
| **Carcasă** | Nickel-plated brass |
| **Manetă** | Alu, painted black |
| **Rulment** | Nickel-plated brass |
| **Etanşare bilă** | PTFE |
| **Etanşare ax** | HNBR / EPDM / PTFE. 2 O-Rings (HNBR / EPDM) 1 gasket (PTFE)<br>additional PTFE-gasket |

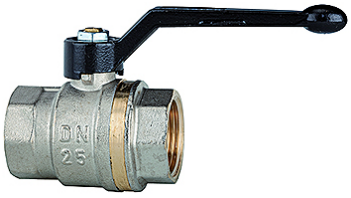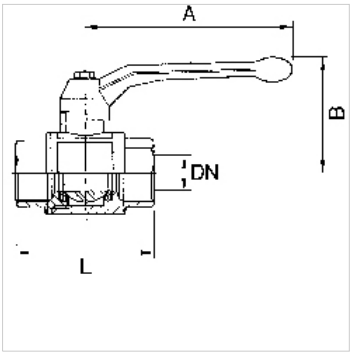


## Indicaţie

Alte date sunt disponibile la cerere.

## Articol

| Denumire | DN | Filet | A (mm) | B (mm) | L (mm) |
|---|---|---|---|---|---|
| **K- 07 30 00 33** | 8 | G 1/4 | 85,0 | 42,0 | 39,0 |
| **K- 07 30 00 34** | 10 | G 3/8 | 85,0 | 42,0 | 43,0 |
| **K- 07 30 00 35** | 15 | G 1/2 | 85,0 | 46,0 | 50,0 |
| **K- 07 30 00 36** | 20 | G 3/4 | 105,0 | 53,0 | 58,0 |
| **K- 07 30 00 37** | 25 | G 1 | 105,0 | 57,0 | 69,0 |
| **K- 07 30 00 38** | 32 | G 1 1/4 | 130,0 | 70,0 | 81,0 |
| **K- 07 30 00 39** | 40 | G 1 1/2 | 130,0 | 76,0 | 93,0 |
| **K- 07 30 00 40** | 50 | G 2 | 165,0 | 92,0 | 110,0 |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*