



K-BKR ANTR D FEDER MS

Brass ball valves, single-acting actuator - spring to close

HANSA FLEX

Caracteristici

Tip constructiv	Pneumatic, double-piston, part-turn actuator, double-rocker principle
Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +150 °C
Unghi de rotație	90 °
Presiune de comandă	5.6 bar
Adaptor supapă	Supplied as standard
Domeniu de temperaturi	-20 °C to +80 °C
Antrenare	aluminium eloxed
Garnitură de antrenare	NBR
Ventil cu bilă	Chrome-plated brass, with ISO-flange plate
Garnitură de etanșare a ventilului cu bilă	PTFE/FKM

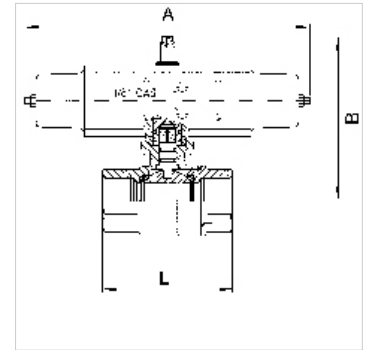

Indicație

Alte date sunt disponibile la cerere.

Articol

Denumire	DN	Filet	A (mm)	B (mm)	L (mm)
K- 07 30 02 35	10	Rp 3/8	221,0	110,0	69,0
K- 07 30 02 36	15	Rp 1/2	221,0	110,0	69,0
K- 07 30 02 37	20	Rp 3/4	221,0	117,0	77,0
K- 07 30 02 38	25	Rp 1	221,0	121,0	89,0
K- 07 30 02 39	32	Rp 1 1/4	221,0	131,0	103,0
K- 07 30 02 40	40	Rp 1 1/2	221,0	137,0	114,0
K- 07 30 02 41	50	Rp 2	240,0	155,0	134,0