

K-MV 3/2 24V DC

3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

Caracteristici

Conexiune electrică	For Pg 11P connector socket, acc. to ISO 4400
Tip de protecţie	IP65 (with connector socket fitted)
Descriere filet	Rp thread acc. to ISO 7-1
Carcasă, scaun al supapei	Brass
Piese interioare	Stainless steel
Garnitură de etanşare	Perbunan (NBR)



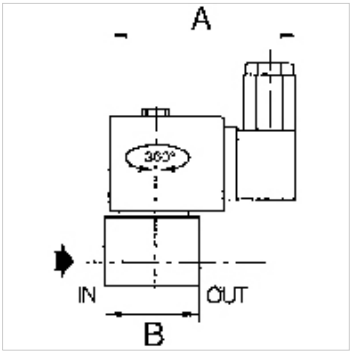

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Articol

Denumire	Filet	presiune max. de lucru (bar)	NW	A (mm)	B (mm)	Forma constructivă
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.