


# K-MV G D 230 V, 50 - 60 HZ

Normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Caracteristici

Conexiune electrică	ISO 4400. cable socket (Pg 11P)
Tip de protecție	IP65 (with connector socket fitted)
Temperatură mediu	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Descriere filet	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Carcasă, scaun al supapei	Brass
Piese interioare	Stainless steel
Garnitură de etanșare	Perbunan (NBR) or FKM

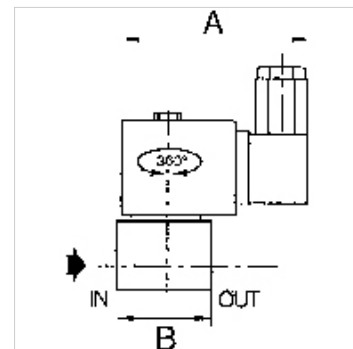

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Articol

Denumire	Filet	presiune max. de lucru (bar)	NW	Material de etanșare	A (mm)	B (mm)	Forma constructivă
K- 07 30 22 35	G 1/8	12	3,2	NBR	75,0	30,0	1
K- 07 30 22 37	G 1/8	12	3,2	FKM	75,0	30,0	1
K- 07 30 22 36	G 1/4	11	3,2	NBR	75,0	40,0	2
K- 07 30 22 38	G 1/4	11	3,2	FKM	75,0	40,0	2