


K-MV G V 230 V, 50 - 60 HZ

Normally closed, pilot-operated, 230 V, 50 to 60 Hz

HANSA FLEX

Caracteristici

Conexiune electrică	ISO 4400. cable socket (Pg 11P)
Tip de protecție	IP65 (with connector socket fitted)
Temperatură mediu	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Descriere filet	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Carcasă, scaun al supapei	Brass
Piese interioare	Stainless steel
Garnitură de etanșare	Perbunan (NBR) or FKM

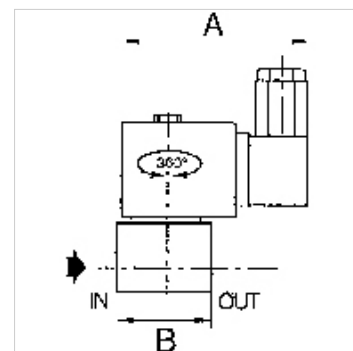

Indicație

Alte date sunt disponibile la cerere.

Descriere

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Articol

Denumire	Filet	presiune max. de lucru (bar)	Presiune de lucru min. (bar)	NW	Material de etanșare	A (mm)	B (mm)	Forma constructivă
K- 07 30 22 54	Rp 3/8	14	0,35	16,0	NBR	75,0	70,0	3
K- 07 30 22 61	Rp 3/8	14	0,35	16,0	FKM	75,0	70,0	3
K- 07 30 22 55	Rp 1/2	14	0,35	16,0	NBR	75,0	70,0	3
K- 07 30 22 62	Rp 1/2	14	0,35	16,0	FKM	75,0	70,0	3
K- 07 30 22 56	Rp 3/4	9	0,35	19,0	NBR	75,0	71,0	3
K- 07 30 22 63	Rp 3/4	9	0,35	19,0	FKM	75,0	71,0	3
K- 07 30 22 57	Rp 1	9	0,35	25,0	NBR	75,0	95,0	4
K- 07 30 22 64	Rp 1	9	0,35	25,0	FKM	75,0	95,0	4
K- 07 30 22 58	Rp 1 1/4	9	0,35	28,0	NBR	75,0	95,0	4
K- 07 30 22 65	Rp 1 1/4	9	0,35	28,0	FKM	75,0	95,0	4
K- 07 30 22 59	Rp 1 1/2	9	0,35	32,0	NBR	75,0	111,0	5
K- 07 30 22 66	Rp 1 1/2	9	0,35	32,0	FKM	75,0	111,0	5
K- 07 30 22 60	Rp 2	9	0,35	44,0	NBR	75,0	129,0	5