
# K-ABBLV 2

Blow-off safety valves G 1/4

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | 0.5 - 60 bar |
| **Temperatura de lucru** | max. 180 °C |
| **Garnituri** | FKM |
| **Carcasă** | Brass |

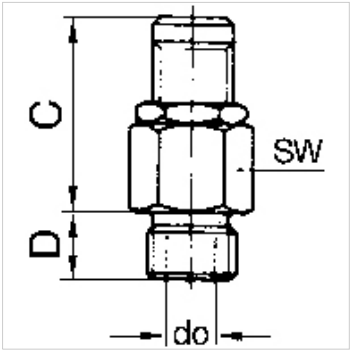


## Indicaţie

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Alte date sunt disponibile la cerere.

## Descriere

Manual adjustment of the blow-off pressure (lock nut).

## Indicaţii referitoare comandă

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

## Informaţii suplimentare

These blow-off valves can also be supplied with a fixed setting and a TÜV type test number. Please ask for an offer.

## Articol

| Denumire | Filet | Presiunea de acţionare | Putere de purjare | C (mm) | D (mm) | do (mm) | SW (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 30 29 18** | G 1/4 | 0.5 - 1.0 bar | to 50 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 21 95** | G 1/4 | 1.0 - 4.0 bar | to 200 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 21 96** | G 1/4 | 3.0 - 7.0 bar | to 350 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 21 97** | G 1/4 | 6.0 - 12.0 bar | to 650 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 21 98** | G 1/4 | 10.0 - 18.0 bar | to 870 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 21 99** | G 1/4 | 16.0 - 32.0 bar | to 1600 l/min | 27,0 | 7,0 | 3,0 | 16 |
| **K- 07 30 22 00** | G 1/4 | 30.0 - 60.0 bar | to 3000 l/min | 27,0 | 7,0 | 3,0 | 16 |

*În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.*