


K-T-STUECKE AG 1

Tees, male-male-male

HANSA FLEX

Caracteristici

| | |
|----------------------|---------------------------------|
| Presiune de lucru | 60 bar |
| Temperatura de lucru | Max. 150 °C |
| Material | Brass with a bare metal surface |
| Filet exterior | conical acc. DIN 2999 |

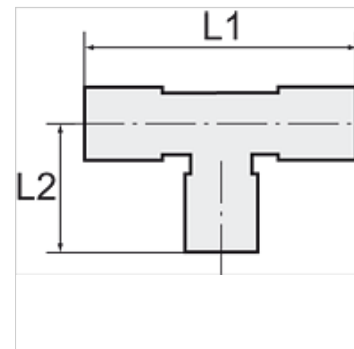

Indicație

Alte date sunt disponibile la cerere.

Articol

| Denumire | Filet | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|------------|------------|------------------------|
| K- 07 40 11 52 | R 1/8 | 37,0 | 18,5 | 10 mm |
| K- 07 40 11 53 | R 1/4 | 47,0 | 23,5 | 13 mm |
| K- 07 40 11 54 | R 3/8 | 52,0 | 26,0 | 17 mm |
| K- 07 40 11 55 | R 1/2 | 62,0 | 31,0 | 21 mm |
| K- 07 40 11 56 | R 3/4 | 66,4 | 33,0 | 25 mm |
| K- 07 40 11 57 | R 1 | 78,0 | 39,0 | 30 mm |