

# K-RD NIPPEL 6 KT

Reducing nipples, hexagonal

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | Max. 20 bar |
| **Filet exterior** | Parallel to DIN EN ISO 228-1 |
| **Filet interior** | Parallel to DIN EN ISO 228-1 |
| **Material** | Stainless steel 1.4408 |

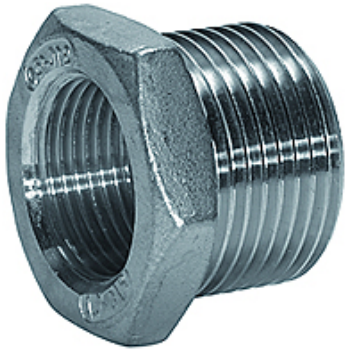

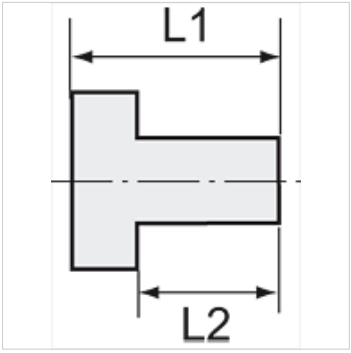


## Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

## Articol

| Denumire | Filet exterior | Filet interior | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|---|---|---|---|---|---|
| **K- 07 40 15 51** | G 1/4 | G 1/8 | 18,1 | 14,0 | 17 mm |
| **K- 07 40 15 52** | G 3/8 | G 1/8 | 19,0 | 12,9 | 21 mm |
| **K- 07 40 15 53** | G 3/8 | G 1/4 | 19,0 | 13,0 | 21 mm |
| **K- 07 40 15 54** | G 1/2 | G 1/4 | 22,0 | 15,6 | 25 mm |
| **K- 07 40 15 55** | G 1/2 | G 3/8 | 24,7 | 16,0 | 26 mm |
| **K- 07 40 15 56** | G 3/4 | G 3/8 | 25,0 | 15,8 | 30 mm |
| **K- 07 40 15 57** | G 3/4 | G 1/2 | 25,0 | 15,9 | 31 mm |
| **K- 07 40 15 58** | G 1 | G 1/2 | 29,0 | 20,0 | 37 mm |
| **K- 07 40 15 59** | G 1 | G 3/4 | 29,0 | 20,0 | 38 mm |
| **K- 07 40 15 60** | G 1 1/4 | G 3/4 | 30,0 | 22,4 | 46 mm |
| **K- 07 40 15 61** | G 1 1/4 | G 1 | 30,0 | 22,2 | 46 mm |
| **K- 07 40 15 62** | G 1 1/2 | G 1 | 32,0 | 23,0 | 53 mm |
| **K- 07 40 15 63** | G 1 1/2 | G 1 1/4 | 32,0 | 23,0 | 53 mm |
| **K- 07 40 15 64** | G 2 | G 1 | 36,0 | 26,0 | 63 mm |
| **K- 07 40 15 65** | G 2 | G 1 1/2 | 36,0 | 26,0 | 63 mm |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*