


Caracteristici

Presiune de lucru max. 10 bari

Domeniu de temperaturi -20 °C to +80 °C

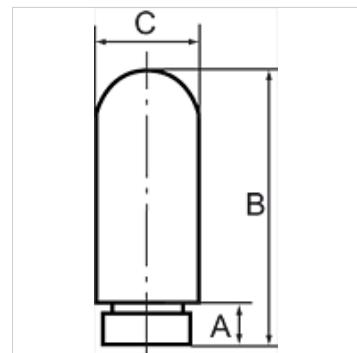

Indicație

Important: The air flowing through the silencer is cooled down. at temperatures below zero, the moisture in the air can freeze, causing the pores of the silencer to close up.

Alte date sunt disponibile la cerere.

Articol

Denumire	Filet	A (mm)	B (mm)	C (mm)
K-07 40 46 90	M 5	5,0	25,0	7,0
K-07 40 40 61	G 1/8	7,0	32,0	13,0
K-07 40 40 62	G 1/4	8,0	39,0	17,0
K-07 40 40 63	G 3/8	11,0	65,0	25,0
K-07 40 40 64	G 1/2	11,5	70,0	25,0
K-07 40 40 65	G 3/4	15,5	138,0	37,0
K-07 40 40 66	G 1	19,5	158,0	48,0