

K-T-TUE
Tee hose connectors

Caracteristici

Presiune de lucru	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Corpul fitingului	Polyamide (PA)
Inel de fixare	Polypropylene (PP)
Piuliţă	Polypropylene (PP)



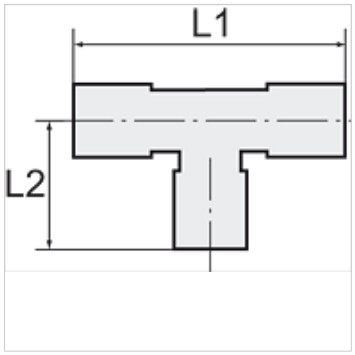

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Articol

Denumire	pentru furtun	L1 (mm)	L2 (mm)
K- 07 40 32 70	4 mm / 6 mm	52,0	26,0
K- 07 40 32 71	6 mm / 8 mm	62,0	31,0
K- 07 40 32 72	8 mm / 10 mm	72,0	36,0
K- 07 40 32 73	9 mm / 12 mm	80,0	40,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.