
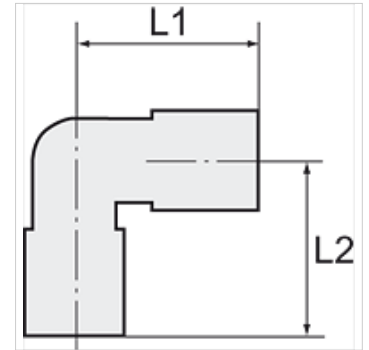


K-W90 SVB

Bulkhead elbow couplings

Caracteristici

| | |
|---------------------------|---|
| Presiune de lucru | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C) |
| Corpul fittingului | Polyamide (PA) |
| Inel de fixare | Polypropylene (PP) |
| Piuliță | Polypropylene (PP) |



Indicație

Alte date sunt disponibile la cerere.

Descriere

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzene, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Articol

| Denumire | Filet | pentru furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|------------|---------------|------------|------------|------------------------|
| K- 07 40 32 78 | M 10 x 1 | 4 mm / 6 mm | 43,0 | 25,0 | 14 mm |
| K- 07 40 32 79 | M 14 x 1,5 | 6 mm / 8 mm | 53,0 | 33,0 | 19 mm |
| K- 07 40 32 80 | M 16 x 1,5 | 8 mm / 10 mm | 58,0 | 36,0 | 22 mm |
| K- 07 40 32 81 | M 18 x 1,5 | 9 mm / 12 mm | 67,0 | 43,0 | 24 mm |