

# K-SV 6 3

Bulkhead connectors



**HANSA FLEX**

## Caracteristici

Presiune de lucru Max. 18 bar

Material de etanșare Buna-N

Material Alamă nichelată

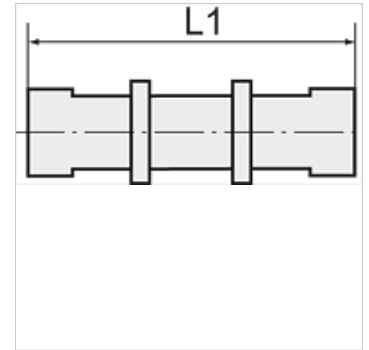

## Indicație

Alte date sunt disponibile la cerere.

## Articol

Denumire	Filet	pentru furtun	L1 (mm)	Deschiderea cheii fixe
K- 07 40 31 24	M 7 x 0.75	5 mm / 3 mm	40,0	9 mm
K- 07 40 31 25	M 10 x 1	6 mm / 4 mm	47,0	14 mm
K- 07 40 31 26	M 12 x 1	8 mm / 6 mm	48,0	16 mm
K- 07 40 31 22	M 14 x 1	10 mm / 8 mm	49,0	17 mm
K- 07 40 31 23	M 16 x 1	12 mm / 10 mm	53,0	19 mm