

K-T AG DREH 1

Male branch tees, swivel type, parallel male thread (M5 - non-swivel type, w/o O-ring)



HANSA FLEX

Caracteristici

Presiune de lucru Max. 18 bar

Material de etanșare Buna-N

Material Alamă nichelată

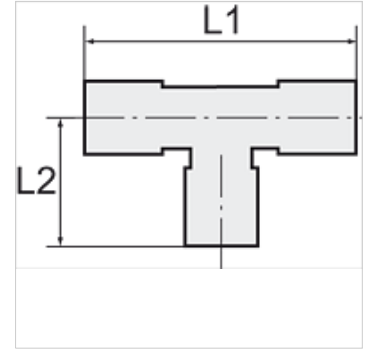

Indicație

Alte date sunt disponibile la cerere.

Articol

| Denumire | Filet | pentru furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|---------------|------------|------------|------------------------|
| K- 07 40 41 46 | M 5 | 5 mm / 3 mm | 43,0 | 15,0 | 8 mm |
| K- 07 40 32 12 | G 1/8 | 6 mm / 4 mm | 39,0 | 22,0 | 13 mm |
| K- 07 40 32 13 | G 1/8 | 8 mm / 6 mm | 45,0 | 20,0 | 14 mm |
| K- 07 40 32 10 | G 1/4 | 6 mm / 4 mm | 39,0 | 26,0 | 16 mm |
| K- 07 40 32 11 | G 1/4 | 8 mm / 6 mm | 40,0 | 27,5 | 16 mm |
| K- 07 40 32 09 | G 1/4 | 10 mm / 8 mm | 45,0 | 27,5 | 16 mm |