

K-SDR AG OR

Banjo elbows, parallel male thread with O-ring


HANSA FLEX

Caracteristici

Presiune de lucru Max. 18 bar

Material de etanșare Buna-N

Material Alamă nichelată

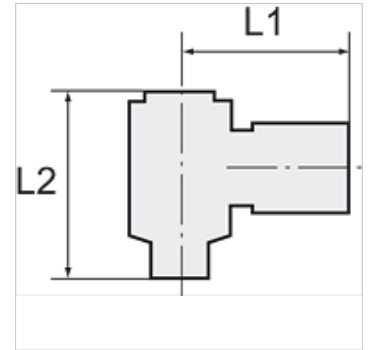

Indicație

Alte date sunt disponibile la cerere.

Articol

| Denumire | Filet | pentru furtun | L1 (mm) | L2 (mm) | Hexagon | Deschiderea cheii fixe |
|----------------|-------|---------------|------------|------------|---------|------------------------|
| K- 07 40 31 52 | M 5 | 5 mm / 3 mm | 16,0 | 17,5 | Male | 8 mm |
| K- 07 40 31 53 | M 5 | 6 mm / 4 mm | 16,0 | 17,5 | Male | 8 mm |
| K- 07 40 31 61 | G 1/8 | 5 mm / 3 mm | 24,0 | 28,0 | Male | 14 mm |
| K- 07 40 31 62 | G 1/8 | 6 mm / 4 mm | 24,0 | 28,0 | Male | 14 mm |
| K- 07 40 31 63 | G 1/8 | 8 mm / 6 mm | 24,0 | 28,0 | Male | 14 mm |
| K- 07 40 31 60 | G 1/8 | 10 mm / 8 mm | 24,0 | 28,0 | Male | 14 mm |
| K- 07 40 31 58 | G 1/4 | 6 mm / 4 mm | 26,0 | 33,0 | Male | 17 mm |
| K- 07 40 31 59 | G 1/4 | 8 mm / 6 mm | 26,0 | 33,0 | Male | 17 mm |
| K- 07 40 31 57 | G 1/4 | 10 mm / 8 mm | 27,5 | 33,0 | Male | 17 mm |
| K- 07 40 31 66 | G 3/8 | 6 mm / 4 mm | 26,0 | 36,0 | Male | 19 mm |
| K- 07 40 31 67 | G 3/8 | 8 mm / 6 mm | 28,5 | 37,0 | Male | 20 mm |
| K- 07 40 31 64 | G 3/8 | 10 mm / 8 mm | 29,0 | 37,0 | Male | 20 mm |
| K- 07 40 31 65 | G 3/8 | 12 mm / 10 mm | 31,5 | 36,0 | Female | 5 mm |
| K- 07 40 31 56 | G 1/2 | 8 mm / 6 mm | 29,0 | 42,0 | Male | 24 mm |
| K- 07 40 31 54 | G 1/2 | 10 mm / 8 mm | 30,5 | 42,0 | Male | 27 mm |
| K- 07 40 31 55 | G 1/2 | 12 mm / 10 mm | 33,0 | 42,0 | Female | 8 mm |