


K-W90 DREH AG OR POM

Male elbows, swivel type, parallel male thread with O-ring (M5 - non-swivel type, w/o O-ring)

HANSA FLEX

Caracteristici

| | |
|----------------------|---|
| Presiune de lucru | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| Temperatura de lucru | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Material | Acetalpolimerizat (POM) |
| Material de etanșare | NBR |

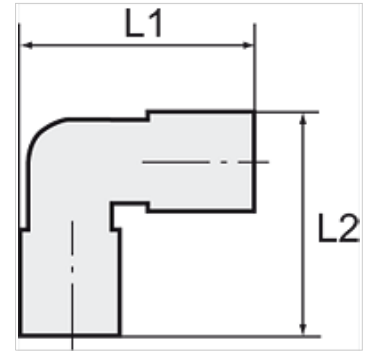

Indicație

Alte date sunt disponibile la cerere.

Descriere

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 28 85 | G 1/8 | 6 mm | 40,0 | 28,1 | 15 mm |
| K- 07 40 28 86 | G 1/8 | 8 mm | 45,6 | 31,1 | 17 mm |
| K- 07 40 28 83 | G 1/4 | 6 mm | 44,1 | 28,1 | 17 mm |
| K- 07 40 28 84 | G 1/4 | 8 mm | 45,5 | 30,9 | 17 mm |
| K- 07 40 28 82 | G 1/4 | 10 mm | 50,3 | 36,2 | 20 mm |
| K- 07 40 28 90 | G 3/8 | 8 mm | 46,5 | 30,9 | 22 mm |
| K- 07 40 28 87 | G 3/8 | 10 mm | 53,3 | 35,7 | 22 mm |
| K- 07 40 28 88 | G 3/8 | 12 mm | 60,4 | 45,0 | 24 mm |
| K- 07 40 28 89 | G 3/8 | 15 mm | 79,8 | 51,4 | 22 mm |
| K- 07 40 28 78 | G 1/2 | 10 mm | 54,8 | 36,2 | 27 mm |
| K- 07 40 28 79 | G 1/2 | 12 mm | 63,6 | 45,5 | 27 mm |
| K- 07 40 28 80 | G 1/2 | 15 mm | 80,0 | 50,6 | 27 mm |
| K- 07 40 28 81 | G 1/2 | 18 mm | 91,5 | 59,7 | 27 mm |