



K-XV AGM

Double nipples, parallel male thread

HANSA FLEX

Caracteristici

| | |
|-------------------|----------------------|
| Presiune de lucru | Max. 20 bar |
| Material | Oțel superior 1.4571 |

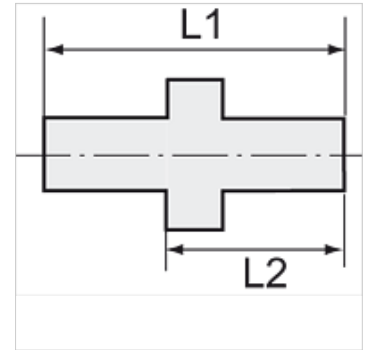

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Informații suplimentare

Further types and dimensions on request.

Articol

| Denumire | Filet 1 | Filet 2 | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|---------|---------|------------|------------|------------------------|
| K- 07 40 11 98 | M 5 | M 5 | 13,0 | 8,0 | 7 mm |
| K- 07 40 11 99 | M 5 | G 1/8 | 17,0 | 12,0 | 14 mm |
| K- 07 40 12 00 | M 5 | G 1/4 | 21,0 | 14,0 | 17 mm |
| K- 07 40 11 95 | G 1/8 | G 1/8 | 21,0 | 13,0 | 14 mm |
| K- 07 40 11 97 | G 1/8 | G 1/4 | 22,0 | 14,0 | 17 mm |
| K- 07 40 11 96 | G 1/8 | G 3/8 | 25,0 | 16,0 | 19 mm |
| K- 07 40 12 01 | G 1/4 | G 1/4 | 23,0 | 14,0 | 17 mm |
| K- 07 40 12 03 | G 1/4 | G 3/8 | 24,0 | 15,0 | 19 mm |
| K- 07 40 12 02 | G 1/4 | G 1/2 | 27,0 | 18,0 | 24 mm |
| K- 07 40 12 04 | G 3/8 | G 3/8 | 25,0 | 15,0 | 19 mm |
| K- 07 40 12 06 | G 3/8 | G 1/2 | 27,0 | 17,0 | 24 mm |
| K- 07 40 12 05 | G 3/8 | G 3/4 | 36,0 | 24,0 | 32 mm |
| K- 07 40 12 07 | G 1/2 | G 1/2 | 29,0 | 17,0 | 24 mm |
| K- 07 40 12 09 | G 1/2 | G 3/4 | 33,0 | 21,0 | 32 mm |
| K- 07 40 12 08 | G 1/2 | G 1 | 40,0 | 24,0 | 36 mm |
| K- 07 40 12 12 | G 3/4 | G 3/4 | 33,0 | 21,0 | 32 mm |
| K- 07 40 12 10 | G 3/4 | G 1 | 40,0 | 24,0 | 36 mm |
| K- 07 40 12 11 | G 1 | G 1 | 42,0 | 26,0 | 36 mm |