

K-XV AGM

Double nipples, parallel male thread

Caracteristici

Presiune de lucru	Max. 20 bar
Material	Oțel superior 1.4571



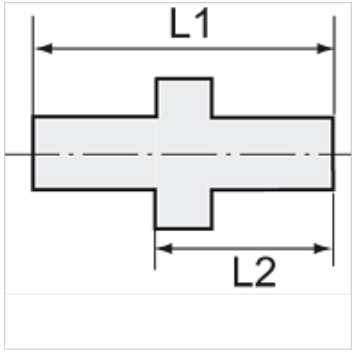

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Informații suplimentare

Further types and dimensions on request.

Articol

Denumire	Filet 1	Filet 2	L1 (mm)	L2 (mm)	Deschiderea cheii fixe
K- 07 40 11 98	M 5	M 5	13,0	8,0	7 mm
K- 07 40 11 99	M 5	G 1/8	17,0	12,0	14 mm
K- 07 40 12 00	M 5	G 1/4	21,0	14,0	17 mm
K- 07 40 11 95	G 1/8	G 1/8	21,0	13,0	14 mm
K- 07 40 11 97	G 1/8	G 1/4	22,0	14,0	17 mm
K- 07 40 11 96	G 1/8	G 3/8	25,0	16,0	19 mm
K- 07 40 12 01	G 1/4	G 1/4	23,0	14,0	17 mm
K- 07 40 12 03	G 1/4	G 3/8	24,0	15,0	19 mm
K- 07 40 12 02	G 1/4	G 1/2	27,0	18,0	24 mm
K- 07 40 12 04	G 3/8	G 3/8	25,0	15,0	19 mm
K- 07 40 12 06	G 3/8	G 1/2	27,0	17,0	24 mm
K- 07 40 12 05	G 3/8	G 3/4	36,0	24,0	32 mm
K- 07 40 12 07	G 1/2	G 1/2	29,0	17,0	24 mm
K- 07 40 12 09	G 1/2	G 3/4	33,0	21,0	32 mm
K- 07 40 12 08	G 1/2	G 1	40,0	24,0	36 mm
K- 07 40 12 12	G 3/4	G 3/4	33,0	21,0	32 mm
K- 07 40 12 10	G 3/4	G 1	40,0	24,0	36 mm
K- 07 40 12 11	G 1	G 1	42,0	26,0	36 mm

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.