


# K-SV MS NI

Bulkhead connectors - nickel-plated brass

**HANSA FLEX**

## Caracteristici

Temperatura de lucru	Max. 150 °C
Presiune	Max. 60 bar
Material	Alamă nichelată

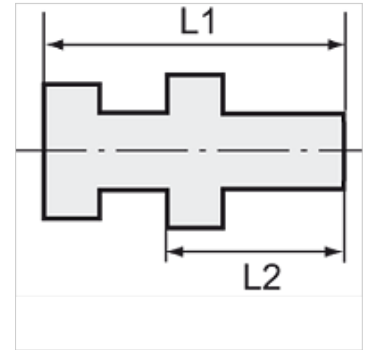

## Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Alte date sunt disponibile la cerere.

## Descriere

Suitable for air, water, oil, steam, etc.

## Informații suplimentare

Further types and dimensions on request.

## Articol

Denumire	Filet exterior	Filet interior	L1 (mm)	L2 (mm)	Deschiderea cheii 1 (mm)	Deschiderea cheii 2 (mm)
K- 07 40 34 27	M 16 x 1.5	G 1/8	18,0	14,0	22	19
K- 07 40 34 28	M 20 x 1.5	G 1/4	26,0	21,0	24	27
K- 07 40 34 29	M 26 x 1.5	G 3/8	26,0	21,0	32	30
K- 07 40 34 30	M 28 x 1.5	G 1/2	33,5	27,0	32	36