



# K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

**HANSA FLEX**

## Caracteristici

Presiune de lucru	10 bar
Temperatură mediu	max. +90 °C
Temperatură ambientală	Max. +90 °C
Material	Nickel-plated brass (banjo bolt), brass (ring nipple)

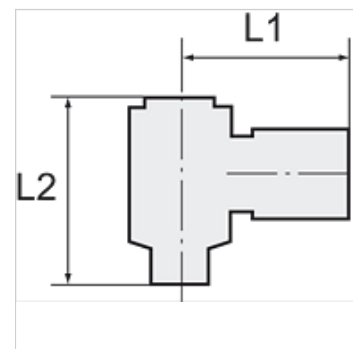

## Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Alte date sunt disponibile la cerere.

## Informații suplimentare

Further types and dimensions on request.

## Articol

Denumire	Filet	pentru furtun	L1 (mm)	L2 (mm)	Deschiderea cheii fixe
K- 07 40 34 39	G 1/8	LW 4 mm	26,0	28,0	14 mm
K- 07 40 34 40	G 1/8	LW 6 mm	26,0	28,0	14 mm
K- 07 40 34 41	G 1/4	LW 6 mm	28,0	29,0	17 mm
K- 07 40 34 42	G 1/4	LW 9 mm	28,0	30,5	17 mm
K- 07 40 34 43	G 3/8	LW 6 mm	30,0	32,0	22 mm
K- 07 40 34 44	G 3/8	LW 9 mm	30,0	32,0	22 mm