

K-VTL KUGELHAEHNE
Distributor block

Caracteristici

Fixare	2 mounting holes in housing (screw size M 5)
Domeniu de presiune	Max. +10 bar, rough vacuum
Domeniu de temperaturi	-10 °C to +100 °C
Filet ventil cu bilă	G 1/4
Carcasă	Die-cast aluminium
Bilă, ax	Ms 58, chrome-plated
Etanşare bilă	PTFE
Inel O	NBR



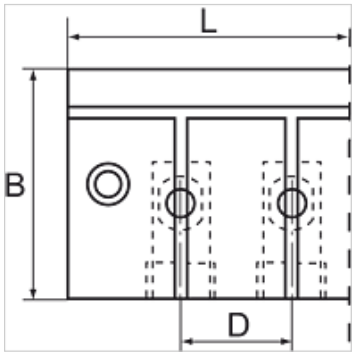

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.
Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Articol

Denumire	Număr de ventile cu bilă	Filet la ieşire	Filet la intrare	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.