


K-VTL BEITSEITIG

Distributor blocks, outlets on both sides (front and back)

HANSA FLEX

Caracteristici

| | |
|------------------------|--|
| Fixare | 2 mounting holes in housing (screw size M 5) |
| Presiune de lucru | max. 10 bari |
| Domeniu de temperaturi | -10 °C to +100 °C |
| Material | Aluminiu |

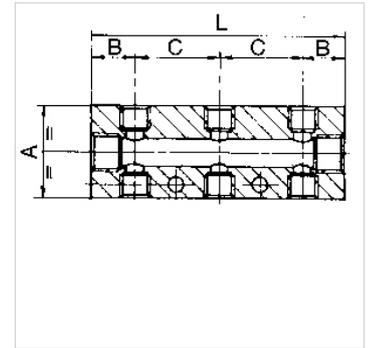

Indicație

Alte date sunt disponibile la cerere.

Descriere

For easy assembly of compressed air taps (screw fittings, unions, couplings, etc.).
Optionally with 2, 3, 4, or 6 outlets on one side or both sides.

Articol

| Denumire | Racord de ieșire | Racord de intrare | A (mm) | B (mm) | C (mm) | L (mm) |
|----------------|------------------|-------------------|-----------|-----------|-----------|-----------|
| K- 07 40 40 28 | 2 + 2 x M 5 | 2 x 1/8 | 20,0 | 15,0 | 15,0 | 45,0 |
| K- 07 40 53 02 | 3 + 3 x M 5 | 2 x 1/8 | 20,0 | 15,0 | 15,0 | 60,0 |
| K- 07 40 40 29 | 4 + 4 x M 5 | 2 x 1/8 | 20,0 | 15,0 | 15,0 | 75,0 |
| K- 07 40 53 03 | 6 + 6 x M 5 | 2 x 1/8 | 20,0 | 15,0 | 15,0 | 105,0 |
| K- 07 40 40 22 | 2 + 2 x 1/8 | 2 x 1/4 | 30,0 | 15,0 | 30,0 | 60,0 |
| K- 07 40 52 92 | 3 + 3 x 1/8 | 2 x 1/4 | 30,0 | 15,0 | 30,0 | 90,0 |
| K- 07 40 40 23 | 4 + 4 x 1/8 | 2 x 1/4 | 30,0 | 15,0 | 30,0 | 120,0 |
| K- 07 40 52 93 | 6 + 6 x 1/8 | 2 x 1/4 | 30,0 | 15,0 | 30,0 | 180,0 |
| K- 07 40 40 24 | 2 + 2 x 1/4 | 2 x 3/8 | 40,0 | 18,0 | 36,0 | 72,0 |
| K- 07 40 52 95 | 3 + 3 x 1/4 | 2 x 3/8 | 40,0 | 18,0 | 36,0 | 108,0 |
| K- 07 40 40 25 | 4 + 4 x 1/4 | 2 x 3/8 | 40,0 | 18,0 | 36,0 | 144,0 |
| K- 07 40 52 96 | 6 + 6 x 1/4 | 2 x 3/8 | 40,0 | 18,0 | 36,0 | 216,0 |
| K- 07 40 40 26 | 2 + 2 x 1/4 | 2 x 1/2 | 40,0 | 22,0 | 36,0 | 80,0 |
| K- 07 40 52 99 | 3 + 3 x 1/4 | 2 x 1/2 | 40,0 | 22,0 | 36,0 | 116,0 |
| K- 07 40 40 27 | 4 + 4 x 1/4 | 2 x 1/2 | 40,0 | 22,0 | 36,0 | 152,0 |
| K- 07 40 53 00 | 6 + 6 x 1/4 | 2 x 1/2 | 40,0 | 22,0 | 36,0 | 224,0 |