



# K-DRGREDV

## Pressure reducing valves

**HANSA FLEX**

### Caracteristici

Presiune de intrare	Max. 15 bar
Racord	G 1/4 internal / external
Material	Alamă

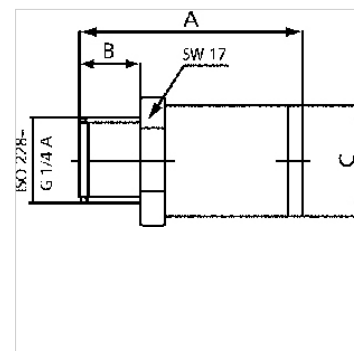

### Indicație

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%  
Alte date sunt disponibile la cerere.

### Descriere

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set. <br>Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

### Articol

Denumire	Presiune de reglare	Debit max. (L/min)	A (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17