
# K-PRAEZI DRUCKREGLER SELU

Precision pressure regulators

## Caracteristici

| | |
|---|---|
| **Presiune de intrare** | Max. 16 bar |
| **Temperatură mediu** | max. 60 °C |
| **Temperatură ambientală** | Max. 60 °C |
| **Medii** | Micro-filtered, unoiled compressed air (0.01 µm) |
| **Racord manometru** | G 1/4 |
| **Racord de dezaerare** | G 3/8 (for mounting a silencer) |
| **Material de etanşare** | NBR |
| **Carcasă** | Die-cast zinc |
| **Consum de aer propriu** | 1.5 - 6 l/min, depending on input pressure and control range |



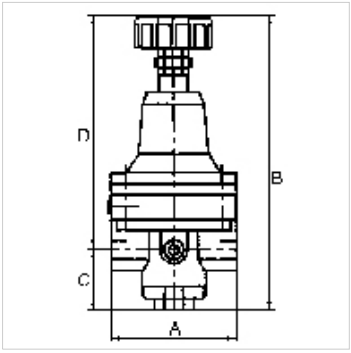


## Indicaţie

The given flow rates are based on the following parameters: 1200 l/min: P1: 5 bar, P2: 3 bar, Δp ≤ 0.1 bar
1400 l/min: P1: 7 bar, P2: 5 bar, Δp ≤ 0.1 bar
1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar. Wear parts kit not supplied! Pressure regulator may only be opened in the factory!
Alte date sunt disponibile la cerere.

## Descriere

With high flow rate and large secondary relief port. Diaphragm pressure regulators with large secondary relief port for applications requiring an extremely accurate working pressure, especially at high flow rates.

## Informaţii suplimentare

on Art. K-07250721: Max. inlet pressure 300 bar. Other cylinder pressure regulators available on request.
1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

## Articol

| Denumire | Filet | Domeniu de reglare | Debit (L/min) | A (mm) | C (mm) | D (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 09 28** | G 1/4 | 0.05 - 3 bar | 700 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 29** | G 1/4 | 0.05 - 7 bar | 1500 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 30** | G 3/8 | 0.05 - 3 bar | 3000 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 31** | G 3/8 | 0.05 - 7 bar | 5500 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 32** | G 1/2 | 0.05 - 3 bar | 3000 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 33** | G 1/2 | 0.05 - 5 bar | 4500 | 82,0 | 43,5 | 159,0 |
| **K- 07 25 09 34** | G 1/2 | 0.05 - 7 bar | 5500 | 82,0 | 43,5 | 159,0 |

## Piese de schimb

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-KM MS** | Hexagonal lock nuts, brass |
| **K-SCHALLDAEPFER VYON** | Vyon silencers |
| **K-FILTERELEMENT** | Filter element |
| **K-XV AGM 2** | Double nipples, parallel male thread |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*