


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Caracteristici

Presiune de intrare	Max. 30 bar
Temperatură mediu	max. 130 °C
Temperatură ambientală	Max. 60 °C
Debit	2500 l/min
Mărimea porilor în elementul filtrant	50 µm
Material de etanşare	FKM
Membrană	PTFE on NBR base
Material	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Măsurarea valorii debitului	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

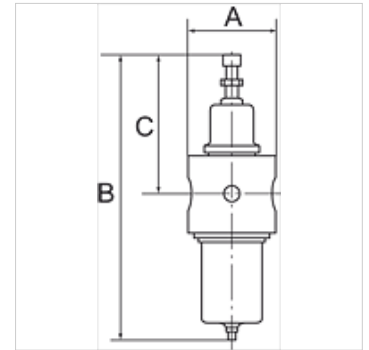

Indicație

Alte date sunt disponibile la cerere.

Descriere

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Indicații referitoare comandă

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Articol

Denumire	Filet	Domeniu de reglare	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Piese de schimb

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts