


K-WV 3/2 ELK 230 VAC / 50HZ HANSA

3/2-way valves, electrically operated, with 230 VAC / 50 Hz solenoid

HANSA FLEX

Caracteristici

| | |
|--|---|
| Presiune de intrare | 2 - 10 bar |
| Domeniu de temperaturi | -10 °C to +50 °C |
| Medii | Aer comprimat |
| Putere de pornire tensiune alternativă 50Hz | 2,2 VA |
| Durată de comutare | ED 100 % |
| Conexiune electrică | Connector type C, ISO 15217, 2 poles +PE |
| Putere de menținere tensiune alternativă 50 Hz | 1,6 VA |
| Putere absorbită DC | 2,5 W |
| Tip de protecție | IP 65 |
| Filet de conectare | Material: Die-cast zinc |
| Carcasă | Material: Grivory® (PA 66) |
| Măsurarea valorii debitului | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

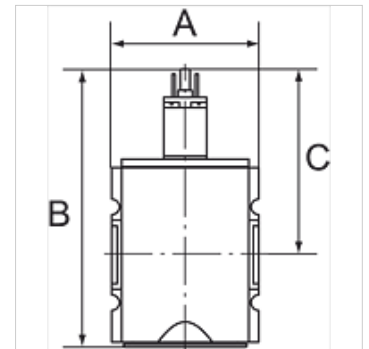

Indicație

Alte date sunt disponibile la cerere.

Descriere

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

Indicații referitoare comandă

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Articol

| Denumire | Filet | Evacuare | Debit (L/min) | A (mm) | B | C (mm) |
|----------------|-------|----------|---------------|--------|----------|--------|
| K- 07 25 11 09 | G 1/4 | 1/4 | 2000 | 52,0 | 117,8 mm | 84,8 |
| K- 07 25 11 10 | G 3/8 | 1/4 | 2000 | 52,0 | 117,8 mm | 84,8 |
| K- 07 25 11 35 | G 3/8 | 1/2 | 4500 | 63,0 | 150,3 mm | 93,8 |
| K- 07 25 11 36 | G 1/2 | 1/2 | 4500 | 63,0 | 150,3 mm | 93,8 |
| K- 07 25 11 41 | G 3/4 | 1/2 | 12500 | 85,0 | 177,7 mm | 110,7 |
| K- 07 25 11 42 | G 1 | 1/2 | 12500 | 85,0 | 177,7 mm | 110,7 |

Accesorii

| | |
|-----------------------------|---|
| K-SCHALLDAE SINTERBR S | Silencers, sintered bronze, slotted |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

Piese de schimb

| | |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector |