


# K-BEFUELLVENTIL HANSA

Filling valves (start-up valves)

**HANSA FLEX**

## Caracteristici

|                             |   |
|-----------------------------|---|
| Presiune de intrare         | 2.5 - 16 bar                                    |
| Domeniu de temperaturi      | -10 °C to +50 °C                                |
| Medii                       | Aer comprimat                                   |
| Filet de conectare          | Material: Die-cast zinc                         |
| Carcasă                     | Material: Grivory® (PA 66)                      |
| Măsurarea valorii debitului | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

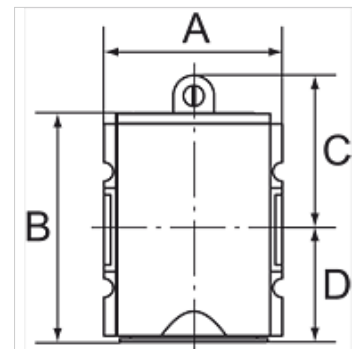

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. These valves prevent a sudden build-up of pressure accompanied by dangerous, jerky cylinder movements. The full cross-section of the regulator is opened at 50% of the input pressure. The filling time can be altered by turning the adjusting screw.

## Informații suplimentare

See 3/2-way valves and filling units

See 3/2-way valves and filling units

## Articol

| Denumire       | Filet | Debit<br>(L/min) | A<br>(mm) | B        | C<br>(mm) | D<br>(mm) |
|----------------|-------|------------------|-----------|----------|-----------|-----------|
| K- 07 25 11 11 | G 1/4 | 1300             | 52,0      | 78,0 mm  | 45,0      | 33,0      |
| K- 07 25 11 12 | G 3/8 | 1300             | 52,0      | 78,0 mm  | 45,0      | 33,0      |
| K- 07 25 11 13 | G 3/8 | 3400             | 63,0      | 111,5 mm | 53,5      | 58,0      |
| K- 07 25 11 14 | G 1/2 | 3400             | 63,0      | 111,5 mm | 53,5      | 58,0      |
| K- 07 25 11 15 | G 3/4 | 8750             | 85,0      | 112,0 mm | 58,0      | 54,0      |
| K- 07 25 11 16 | G 1   | 8750             | 85,0      | 112,0 mm | 58,0      | 54,0      |

## Piese de schimb

K-HALTERBAUSATZ HANSA Holder HANSA