# K-MIKROFI FEINFILTER HANSA


Micro-filters (fine filters)

HANSA FLEX

## Caracteristici

| | |
|---|---|
| **Presiune de intrare** | 1.5 - 16 bar |
| **Domeniu de temperaturi** | -10 °C to +50 °C |
| **Medii** | Aer comprimat |
| **Finețea filtrului** | 0,01 µm |
| **Filet de conectare** | Material: Die-cast zinc |
| **Recipient** | Polycarbonate (with bayonet lock) |
| **Element filtrant** | Borosilicate glass fibre |
| **Carcasă** | Material: Grivory® (PA 66) |
| **Coș de protecție** | Polyamide |
| **Separarea prafului** | Class 1 acc. to DIN ISO 8753-1 |
| **Măsurarea valorii debitului** | At P2 = 6 bar and pressure drop Δp = 0.5 bar |



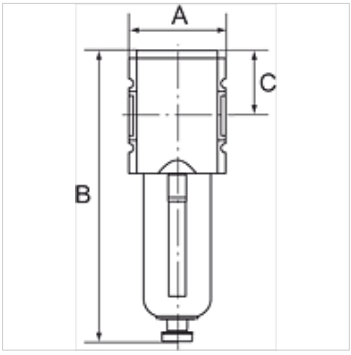


## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Micro-filters in modern design for compliance with strict compressed air purity requirements. Micro-filters are used to separate solid oil, water and solid impurities as small as 0.01 µm from compressed air and gases.

## Articol

| Denumire | Filet | Debit (L/min) | A (mm) | B | C (mm) | Scurgere pentru condens |
|---|---|---|---|---|---|---|
| **K- 07 25 10 33** | G 1/4 | 350 | 52,0 | 169,5 mm | 39,5 | Semi |
| **K- 07 25 10 34** | G 3/8 | 350 | 52,0 | 169,5 mm | 39,5 | Semi |
| **K- 07 25 10 35** | G 3/8 | 450 | 63,0 | 195,0 mm | 47,8 | Semi |
| **K- 07 25 10 36** | G 1/2 | 450 | 63,0 | 195,0 mm | 47,8 | Semi |
| **K- 07 25 10 19** | G 3/4 | 1500 | 85,0 | 255,0 mm | 63,0 | Semi |
| **K- 07 25 10 20** | G 1 | 1500 | 85,0 | 255,0 mm | 63,0 | Semi |
| | | | | | | |
| **K- 07 25 10 37** | G 1/4 | 350 | 52,0 | 186,5 mm | 39,5 | Auto |
| **K- 07 25 10 38** | G 3/8 | 350 | 52,0 | 186,5 mm | 39,5 | Auto |
| **K- 07 25 10 39** | G 3/8 | 450 | 63,0 | 210,5 mm | 47,8 | Auto |
| **K- 07 25 10 40** | G 1/2 | 450 | 63,0 | 210,5 mm | 47,8 | Auto |
| **K- 07 25 10 21** | G 3/4 | 1500 | 85,0 | 269,0 mm | 63,0 | Auto |
| **K- 07 25 10 22** | G 1 | 1500 | 85,0 | 269,0 mm | 63,0 | Auto |

## Piese de schimb

| | |
|---|---|
| **K-HALTERBAUSATZ HANSA** | Holder HANSA |
| **K-ERSATZBEHAELTER HANSA POLY** | Spare tank HANSA polycarbonat |
| **K-DIFFERENZDRUCKANZEI MONO** | Differential pressure and differential pressure gauge |
| **K-DIFFERENZDRUCKMANOMETER** | Differential pressure gauge |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*