


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Caracteristici

| | |
|-----------------------------|---|
| Presiune de intrare | 1.5 - 16 bar |
| Presiune de ieșire | 0.5 - 8 bar |
| Domeniu de temperaturi | -10 °C to +50 °C |
| Medii | Aer comprimat |
| Finețea filtrului | 5,00 μm |
| Filet de conectare | Material: Die-cast zinc |
| Recipient | Polycarbonate (with bayonet lock) |
| Element filtrant | Cellpor (PE) |
| Carcasă | Material: Grivory® (PA 66) |
| Membrană | NBR |
| Coș de protecție | Polyamide |
| Cap ungător | PA |
| Consum de aer propriu | Max. 1.5 l/min (depending on secondary pressure) |
| Măsurarea valorii debitului | At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar |

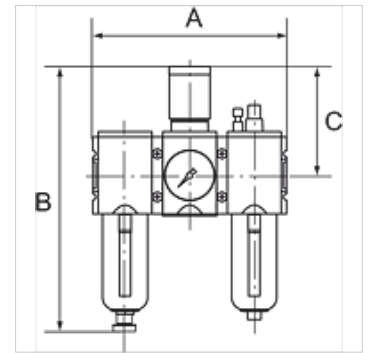

Indicație

Alte date sunt disponibile la cerere.

Descriere

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Indicații referitoare comandă

The price does not include a key lock. Please order separately.

Articol

| Denumire | Filet | Debit (L/min) | A (mm) | B | C (mm) | Scurgere pentru condens |
|----------------|-------|---------------|--------|----------|--------|-------------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Accesorii

K-STECKSCHLOSS Key lock

Piese de schimb

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |