


K-FI REGL PC-BEHÄEL S MANO MULTIFIX

Filter regulators with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Caracteristici

Presiune de intrare	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temperatură mediu	max. 60 °C
Temperatură ambientală	Max. 60 °C
Mărimea porilor în elementul filtrant	5 µm (C55: 40 µm)
Material de etanşare	NBR
Apărătoare de arc	POM-brass
Carcasă	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Măsurarea valorii debitului	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

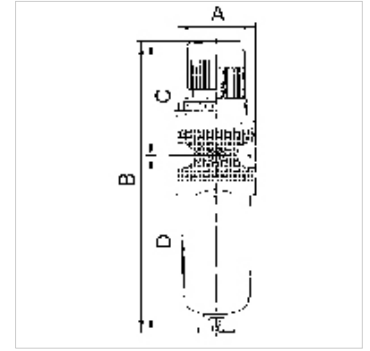

Indicație

Alte date sunt disponibile la cerere.

Descriere

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Indicații referitoare comandă

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Articol

Denumire	Filet	Domeniu de reglare	Debit (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Dimensiunea constructivă
K- 07 25 00 67	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 00 71	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 00 75	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 00 79	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 00 83	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3

Piese de schimb

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHÄELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHÄELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-VERSCHLEI-SATZ	Set of wearing parts
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve