


K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Caracteristici

Presiune de intrare	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temperatură mediu	max. 60 °C
Temperatură ambiantă	Max. 60 °C
Material de etanșare	NBR
Carcasă	Die-cast zinc, Aluminium for G 1 variant
Cap ungător	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Manual
Sortiment de ulei	CL 32 acc. to DIN 51517 - ISO VG 32
Măsurarea valorii debitului	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

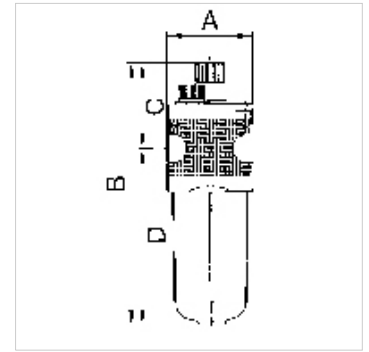

Indicație

Alte date sunt disponibile la cerere.

Descriere

Proportional lubricators, oil can be filled under pressure.

Articol

Denumire	Filet	Debit (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Dimensiunea constructivă
K- 07 25 00 92	G 1/4	1900	47,8	181,3 mm	71,3	110,0	6	1
K- 07 25 00 95	G 3/8	1900	47,8	181,3 mm	71,3	110,0	10	1
K- 07 25 00 98	G 1/2	5000	68,8	213,0 mm	79,3	133,7	15	2
K- 07 25 01 01	G 3/4	5000	68,8	213,0 mm	79,3	133,7	20	2
K- 07 25 01 04	G 1	18000	100,0	322,9 mm	82,7	240,2	25	3

Piese de schimb

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal