K-SCHALTVENTILE 3/2 MULTIFIX MINI


On-off valves (3/2-way valves)

HANSA-FLEX

Caracteristici

Presiune de intrare	Min. 2 bar, max. 10 bar
Temperatură mediu	max. 60 °C
Temperatură ambientală	Max. 60 °C
Conexiune electrică	Device plug PG 9, type B, EN 175301-803
Tip de protecţie	IP 65 (P 54) acc. to DIN 40050
Debit	1600 l/min
Durată de comutare relativ	100 %
Racord de dezaerare	Silencer G 1/4
Material de etanşare	NBR
Carcasă	Die-cast zinc
Măsurarea valorii debitului	At P1 = 6 bar and pressure drop Δp = 1 bar



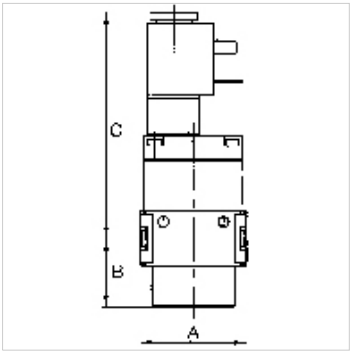

Indicaţie

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Alte date sunt disponibile la cerere.

Descriere

Pneumatic systems or parts of systems can be switched on and off by means of anelectrical signal. When they are switched off, the system is relieved at the same time.

Articol

Denumire	Filet	Bobină magnetică	A (mm)	B	C (mm)	Dimensiunea constructivă
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

Piese de schimb

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.