
K-NEBELOELER MINI

Mini oil-mist lubricator

Caracteristici

Presiune de lucru	min. 2 bar - max. 6 bar
Temperatură mediu	max. 50 °C
Temperatură ambientală	Max. 50 °C
Poziție de montare în direcția de curgere	Oil intake at the lowest point/any
Recipient pentru ulei	Polycarbonate
Sortiment de ulei	CL 32 acc. to DIN 51517 - ISO VG 32



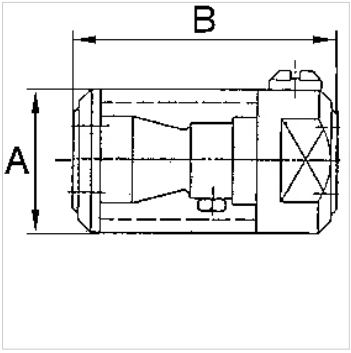

Indicație

Alte date sunt disponibile la cerere.

Descriere

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines). Fixed drip rate: Approx. 0.4 cm3 per 100 work cycles, one filling = 3000 work cycles. Oil consumption in continuous operation (at 6 bar): 0.15 cm3 / Nm3 (varies depending on ambient temperature and oil used).

Articol

Denumire	Filet	A (mm)	B	DN
K- 07 25 09 11	G 1/4	33,0	60,0 mm	8
K- 07 25 09 12	G 3/8	33,0	60,0 mm	8

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.